


2 Series

Capacity up to **325 lbs each**

MODULAR STEM



Standard Dimensions



Features

- Zinc plated finish is attractive and durable
- Full double ball hardened raceways for better performance and greater durability
- 3/8" hollow axle with lock nut
- Grease holes on wheel bearing for greater convenience
- "Colson 45" multi-temp grease lubricates in extreme hot and cold temperatures

Standard Mounting

- Colson modular stem casters feature a 1/2" hollow rivet which will accept a wide variety of mounting stems (even a standard 1/2" bolt will work)
- You can supply the mounting fasteners or stems – we supply the casters

Caster Brake



Top Lock
(See page 96) Available on all swivel models with solid axle only. Field installable (Specify **BRK1**; Example: 2.05250.91 BRK1).



Total Lock
(See page 96) Locks wheel and swivel simultaneously. Fits 3 1/2", 4" and 5" swivel models. Field installable (Specify **BRK5**; Example: 2.05250.565 COND BRK5).

Fork Option

NSF Listed For Food Service Industry

All models except thread guards and cast iron wheels (Specify **FSI**; Example: 2.05250.441 FSI).

Swivel Dust Cap

(See page 101) (Specify **DC1**; Example: 2.05250.441 DC1).


Forks Only

To order caster forks only use 1st 6 digits of model numbers (Example: 2.02250).

Axle/Nut Options

Consult factory.

Wheel Selection

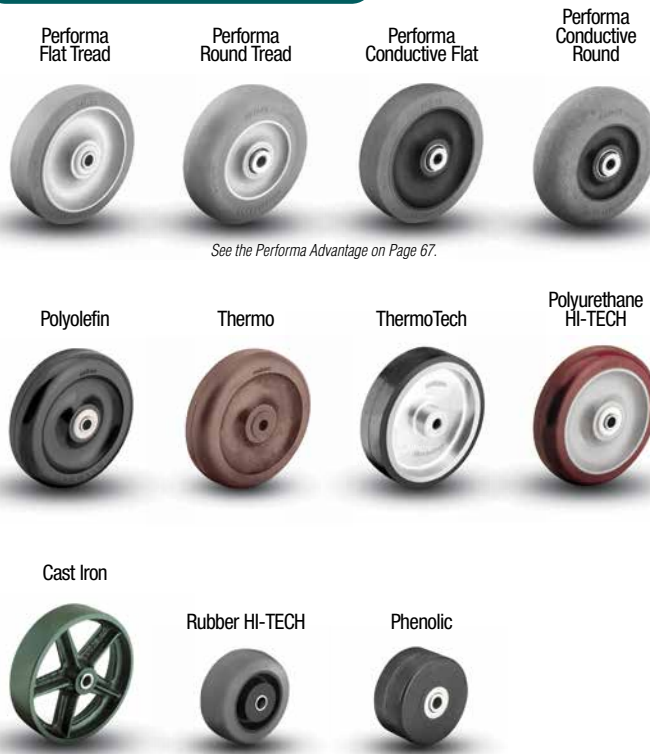

See the Performa Advantage on Page 67.

Wheel Option

Thread Guards

(See page 108) Available on many models. Specify **TG1** for metal or **TG2** for plastic; Example: 2.05250.441 TG2.

Colson 2 Series Casters • Modular Stem • Capacity to 325 lbs

Wheel Dia.	Tread Width	Capacity Each (Pounds)	Wheel Descriptions	Wheel Bearing	Stem Caster Models	Load Height	Swivel Radius	Weight (Pounds)		
2 1/2"	1 1/4"	125	Performa Rubber (Conductive/Flat)	Ball	2.02250.445 COND	3 3/4"	2 13/32"	1 1/2		
		140	Performa Rubber (Flat)	Delrin	2.02250.441	3 3/4"	2 13/32"	1 1/2		
			Performa Rubber (Flat)	Ball	2.02250.445	3 3/4"	2 13/32"	1 1/2		
		200	Polyolefin	Delrin	2.02250.53	3 3/4"	2 13/32"	1 1/2		
			Polyolefin	Ball	2.02250.55	3 3/4"	2 13/32"	1 1/2		
		250	Polyurethane HI-TECH	Delrin	2.02250.91	3 3/4"	2 13/32"	1 1/4		
	Polyurethane HI-TECH		Ball	2.02250.95	3 3/4"	2 13/32"	1 1/4			
	200	Cast Iron	Sleeve	2.02250.12	3 3/4"	2 13/32"	2			
1 7/16"	300	Phenolic	Roller	2.02250.319	3 3/4"	2 13/32"	1 1/2			
3"	1 1/4"	150	Rubber HI-TECH	Plain	2.03350.42	4 "	2 21/32"	2		
		200	Polyurethane HI-TECH	Plain	2.03350.92	4 "	2 21/32"	2		
			Polyolefin	Delrin	2.03350.52	4 "	2 21/32"	2		
	1 15/32"	300	Phenolic	Roller	2.03350.309	4 "	2 21/32"	2 3/4		
3 1/2"	1 5/16"	210	Performa Rubber (Conductive/Round)	Ball	2.03250.565 COND	4 9/16"	2 29/32"	2		
			Performa Rubber (Round)	Delrin	2.03250.561	4 9/16"	2 29/32"	2		
			Performa Rubber (Round)	Ball	2.03250.565	4 9/16"	2 29/32"	2		
	1 1/4"	225	Performa Rubber (Conductive/Flat)	Ball	2.03250.445 COND	4 9/16"	2 29/32"	1 3/4		
			Polyolefin	Delrin	2.03250.53	4 9/16"	2 29/32"	1 3/4		
		230	Polyolefin	Ball	2.03250.55	4 9/16"	2 29/32"	1 3/4		
			Performa Rubber (Flat)	Delrin	2.03250.441	4 9/16"	2 29/32"	1 3/4		
		250	Performa Rubber (Flat)	Ball	2.03250.445	4 9/16"	2 29/32"	1 3/4		
			Polyurethane HI-TECH	Delrin	2.03250.91	4 9/16"	2 29/32"	1 3/4		
			Polyurethane HI-TECH	Ball	2.03250.95	4 9/16"	2 29/32"	1 3/4		
		300	Thermo	Plain	2.03250.52 HT	4 9/16"	2 29/32"	2 3/4		
			Cast Iron	Sleeve	2.03250.12	4 9/16"	2 29/32"	2 7/8		
		4"	1 1/4"	250	ThermoTech®	Teflon	2.04250.613 H	5 "	3 7/32"	3
					Performa Rubber (Conductive/Flat)	Ball	2.04250.445 COND	5 "	3 7/32"	2 1/8
275	Polyolefin			Delrin	2.04250.53	5 "	3 7/32"	2 1/8		
	Polyolefin			Ball	2.04250.55	5 "	3 7/32"	2 1/8		
	Polyurethane HI-TECH			Delrin	2.04250.91	5 "	3 7/32"	1 7/8		
	Polyurethane HI-TECH			Ball	2.04250.95	5 "	3 7/32"	1 7/8		
300	Performa Rubber (Flat)		Delrin	2.04250.441	5 "	3 7/32"	2 1/8			
	Performa Rubber (Flat)		Ball	2.04250.445	5 "	3 7/32"	2 1/8			
	Thermo		Plain	2.04250.52 HT	5 "	3 7/32"	3 1/8			
Cast Iron	Sleeve		2.04250.12	5 "	3 7/32"	3 1/8				
5"	1 1/4"		250	ThermoTech®	Teflon	2.05250.613 H	6 1/16"	3 13/16"	3	
				Performa Rubber (Conductive/Flat)	Ball	2.05250.445 COND	6 1/16"	3 13/16"	2 3/4	
	1 5/16"		250	Performa Rubber (Conductive/Round)	Ball	2.05250.565 COND	6 1/16"	3 13/16"	2 3/4	
		Performa Rubber (Round)		Delrin	2.05250.561	6 1/16"	3 13/16"	2 3/4		
		Performa Rubber (Round)		Ball	2.05250.565	6 1/16"	3 13/16"	2 3/4		
	1 1/4"	300	Polyolefin	Delrin	2.05250.53	6 1/16"	3 13/16"	2 1/4		
			Polyolefin	Ball	2.05250.55	6 1/16"	3 13/16"	2 1/4		
			Polyurethane HI-TECH	Delrin	2.05250.91	6 1/16"	3 13/16"	2 1/4		
			Polyurethane HI-TECH	Ball	2.05250.95	6 1/16"	3 13/16"	2 1/4		
		325	Cast Iron	Sleeve	2.05250.12	6 1/16"	3 13/16"	3 1/2		
			Performa Rubber (Flat)	Delrin	2.05250.441	6 1/16"	3 13/16"	2 1/2		
			Performa Rubber (Flat)	Ball	2.05250.445	6 1/16"	3 13/16"	2 1/2		
			Thermo	Plain	2.05250.52 HT	6 1/16"	3 13/16"	3 1/4		

2 Series